



### Sennheiser Documentation App



or online at  
[www.sennheiser.com/download](http://www.sennheiser.com/download)  
 evolution wired\_



# e 865/e 865 S

Quick Guide  
 Kurzanleitung  
 Guide rapide  
 Guida rapida  
 Guía de inicio rápido  
 Guia rápido  
 Beknopte handleiding  
 Krótka instrukcja obsługi  
 Snabbguide

Kvikstartguide  
 Pikaohje  
 Γρήγορος οδηγός  
 Kisa Kilavuz  
 Краткая инструкция  
 快速指南  
 快速使用指南  
 クイックガイド  
 퀵 가이드


Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany  
[www.sennheiser.com](http://www.sennheiser.com)

Publ. 06/19, 581331/A02


## SENNHEISER

### Setup



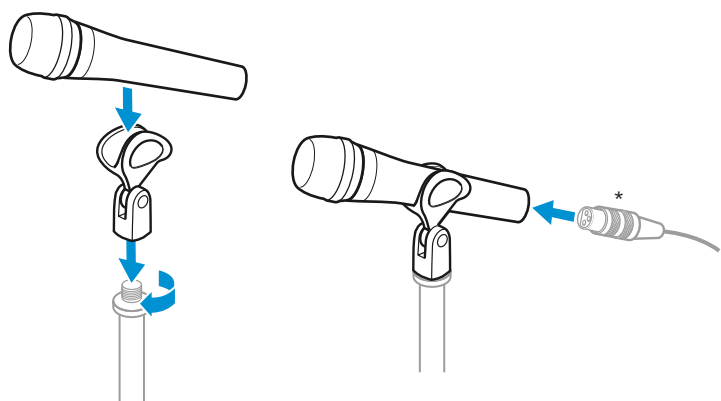


\*XLR-3 cable not included


### In the box

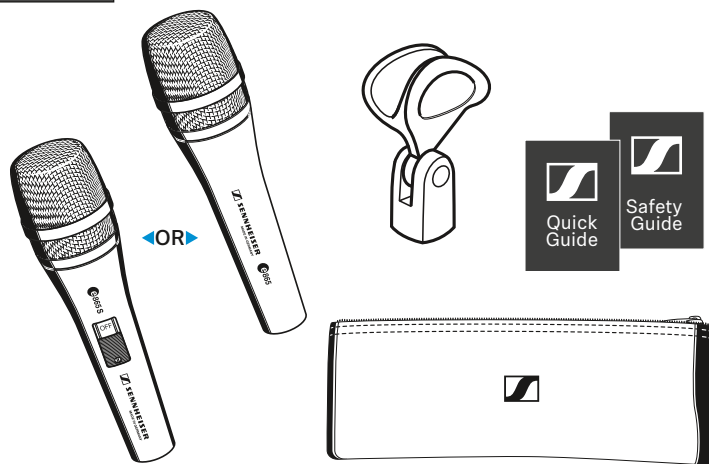


### Overview

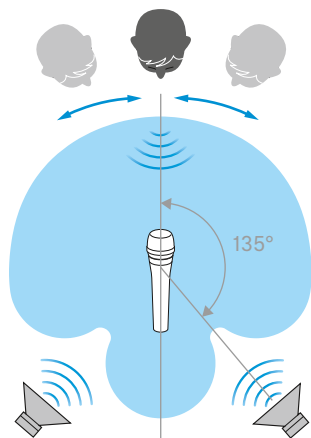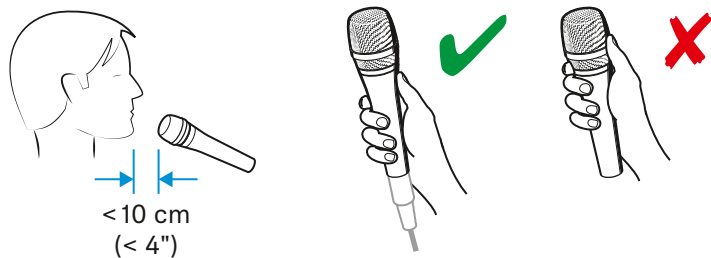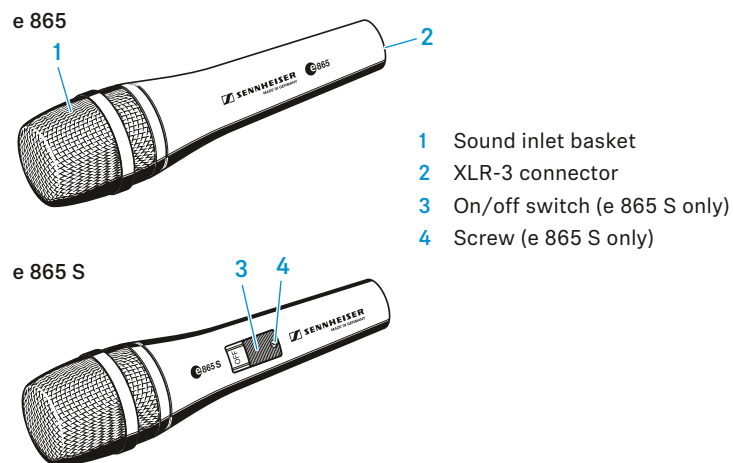

### ON/OFF






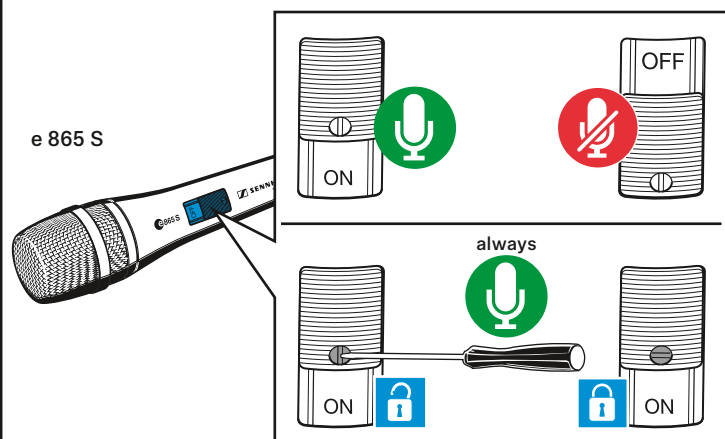


## Accessory

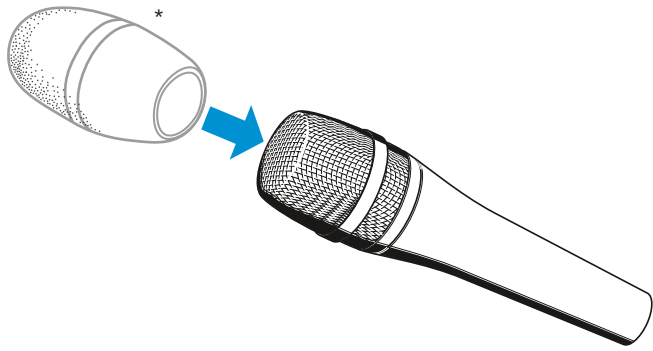

\*MZW 4032 not included


## Cleaning

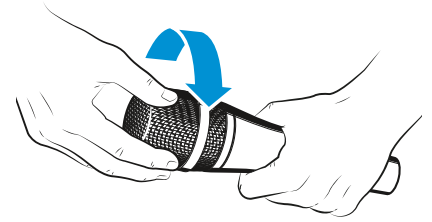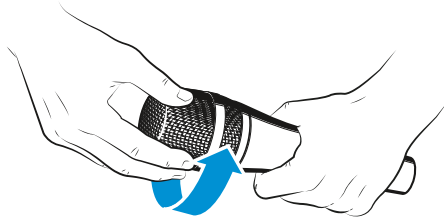

## Specifications

Transducer principle	pre-polarized condenser microphone
Frequency response	40 - 20,000 Hz
Pick-up pattern	super-cardioid
Sensitivity (free field, at 1 kHz)	3 mV/Pa
Nominal impedance (at 1 kHz)	200 Ω (balanced)
Min. terminating impedance	1 kΩ
Max. sound pressure level (at 1 kHz)	150 dB
Phantom powering	12 - 48 V
Connector	XLR-3
Temperature range	0 °C to +40 °C
Dimensions	∅ 47 x 193 mm
Weight	311 g

## Connector assignment

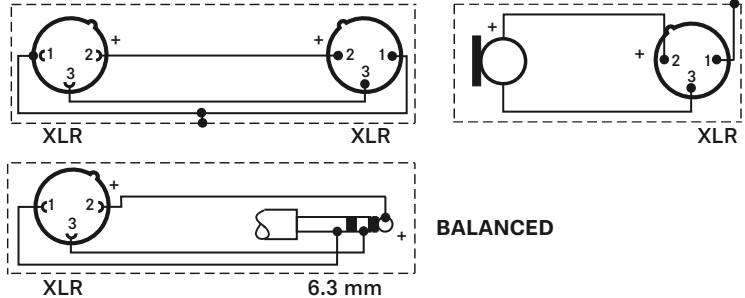

## Polar pattern and frequency response

